



## GERMICIDAL UV REPLACEMENT LAMP

**PROIAQ-UVL1, PROIAQ-UVL2 and PROIAQ-UVL3 replacement UVC lamps** are the simple, safe and effective way to keep your air purification system clean and improve indoor air quality. Homeowners can breathe easy knowing their family is protected by this proven technology.

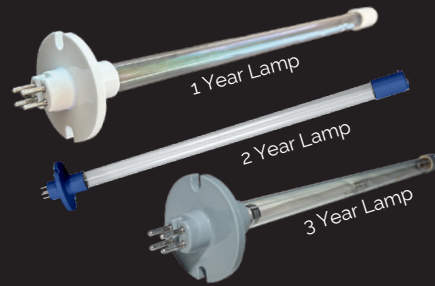

## DIMENSIONS

- A - Base face to opposite pin length.....**14" (355.6 mm)**
- B - Base face to base face length.....**14.06" (357 mm)**
- C - Diameter ..... **.59" (15.0 mm)**

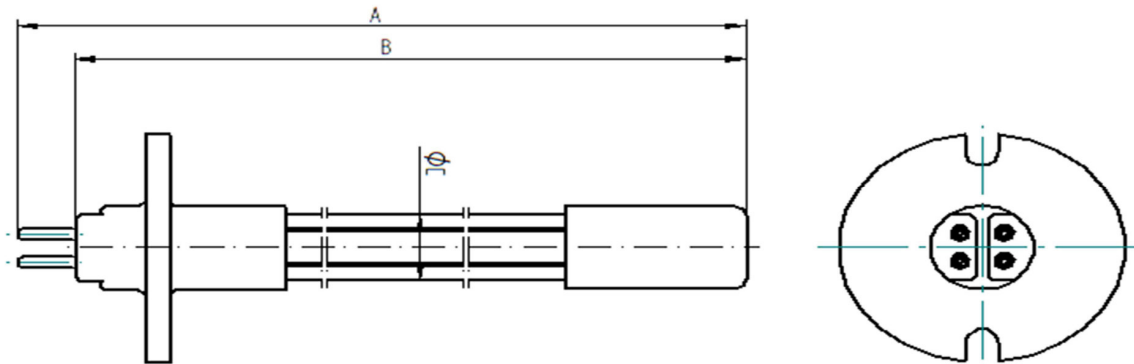

## PHYSICAL DATA

- UV Output 253.7nm (100hr)..... **5.7 W**
- Intensity @ 1m ..... **57 μW/**
- UVL1** Rated Average Life..... **9,000 hrs (1 year)**
- UVL2** Rated Average Life..... **16,000 hrs (2 year)**
- UVL3** Rated Average Life..... **24,000 hrs (3 year)**




## ELECTRICAL DATA

(NOMINAL VALUES)

- Lamp Wattage ..... **17 W**
- Lamp Current..... **425 mA**
- Lamp Voltage ..... **42 V**

## MAINTENANCE CURVE

The useful life is determined on the operation condition of the lamp (for example type of ballast, ignitor used, cooling conditions, on/off cycle, etc.)

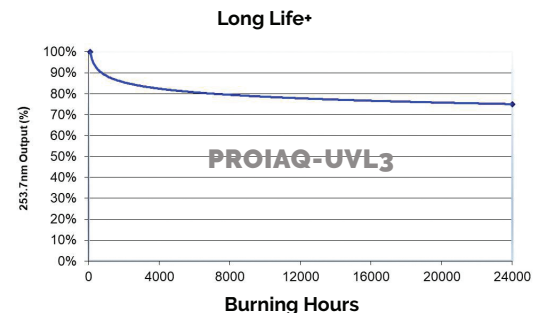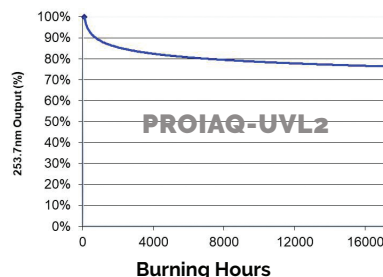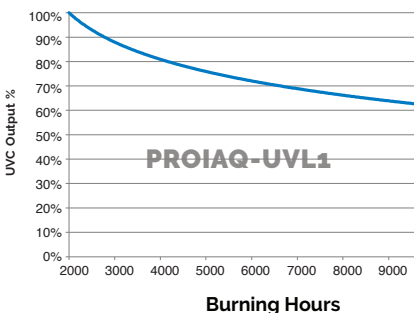

**Note:** Performance data are valid under laboratory conditions using HIGH FREQUENCY ELECTRONIC BALLAST.